


Rtec RCBO



EN 61009-1
EN 61009-2-1


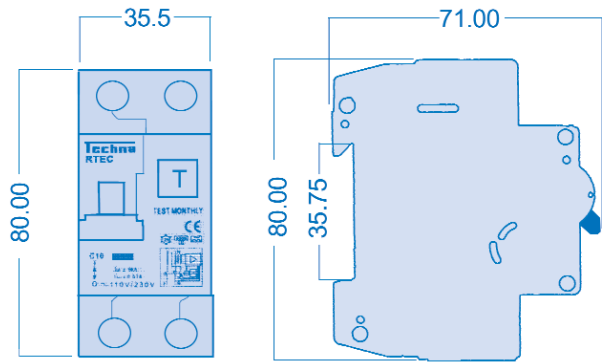


TECHNA'S Rtec range provides combined residual current (earth leak) protection and overload/short circuit protection in a single device and can be used to replace an RCCB/MCB combination.

Rtec features dual pole switching (live and neutral disconnect) and provides protection against pulsating dc current leakage.

Rtec RCBO Technical Specification:

RATED CURRENT	6, 10, 16, 20, 25, 32, 40A
RATED VOLTAGE (UN)	110Vac - 230Vac
NUMBER OF POLES	2
ELECTRICAL LIFE	4000 Switching Operations
RATED RESIDUAL OPERATING CURRENT (I _n)	30, 100, 300 mA
RATED SHORT CIRCUIT CAPACITY (I _{nc})	6kA
OVERLOAD TRIPPING	Trip Curves Type B and C

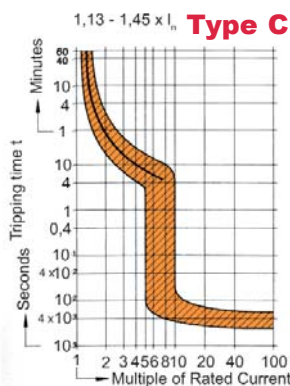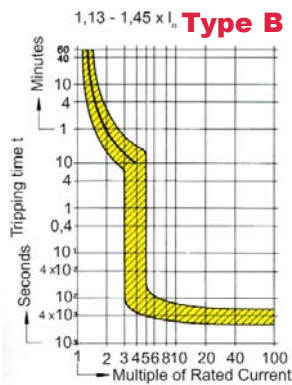

Rtec Ordering Scheme:

