


TRIPLE LEVEL WITH GROUND TERMINAL BLOCKS

The CTLG2.5 is a triple level Terminal Block with an additional connection for earthing cables. This separate connection point is appropriately identified by the green - yellow imprint on its top.

This Terminal Block is an ideal choice for motor, sensor, actuator and initiator connections.

CTLG2.5

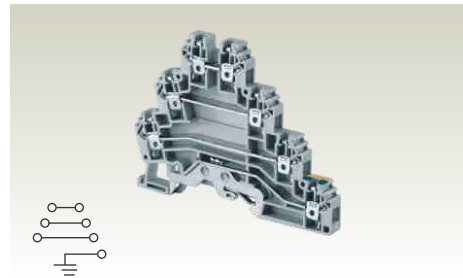

Width (Thickness) x Length		6 x 87.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		66.0 mm / 74.0 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm ²	24 - 12 AWG
	Solid	0.2 - 4.0 mm ²	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm ²	24 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 1.5 mm ²	24 - 14 AWG
	with TWIN Ferrule / Lug	0.2 - 1.5 mm ²	24 - 14 AWG
Wire Stripping Length		9 mm	
Ratings As Per		IEC60947-7-1 UL-1059	
Voltage		440 V	300 V
Current		24 A	24 A
Torque		0.4 Nm	4.5 lb-in
Approvals			
Insulation Material / Comparative Tracking Index		Polyamide 66 / 1	
Rated Impulse Voltage / Pollution Degree		6 KV / 3	
		Type / Cat. No.	Standard Pack
Terminal Block		CTLG2.5	100
End Plate		EPCTLG2.5	50
Mounting Rail (Refer Pg. 154 for details)		CA701 CA701-15	50 m 50 m
End Clamp (Refer Pg. 155 for details)		CA702 CA802 CA202	50 50 50
Pre Assembled Shorting Links	2 pole	CA627/2	I _{max.} : 24 A 100
	3 pole	CA627/3	24 A 100
	4 pole	CA627/4	24 A 100
	10 pole	CA627/10	24 A 10
Insulated Pre Assembled Shorting Links	2 pole	CA647/2	I _{max.} : 24 A 100
	3 pole	CA647/3	24 A 100
	4 pole	CA647/4	24 A 100
	10 pole	CA647/10	24 A 10
Permanent Shorting Links	2 pole	CA703/1	I _{max.} : 24 A 100
	3 pole	CA704/1	24 A 100
	4 pole	CA705/1	24 A 100
	10 pole	CA732/10	24 A 100
	10 pole (Breakable)	CA732/10-A	24 A 100
	100 pole	CA732/100	24 A 10
Short Sleeve & Screw for Permanent Shorting Links		CA611/S/Q	100
Insulated External Shorting Links	2 pole	CA715/2	I _{max.} : 24 A 100
	3 pole	CA715/3	24 A 100
	4 pole	CA715/4	24 A 100
	10 pole	CA715/10	24 A 20
Test Socket		CA707/TS/01	100
Marking Tags (Refer Pg. 157 for details)		CA509/K2G	100
Screw Driver		SCS0.5/3	Blade size: 0.5 x 3 mm 10